| *Apollo*Valves | | | | | | | |
|----------------|-----|-----|-----|--|--|--|--|
| SUBMIT | TAL | SHE | ET, | | | | |

-77F-200 Series-

Full Port Solder End Brass Ball Valve

| Job Name: | |
|------------------------|--|
| Job Location: | |
| Engineer: | |
| Contractor: | |
| Tag: | |
| PO Number: | |
| Representative: | |
| Wholesale Distributor: | |





DESCRIPTION

The Apollo 77F-200 series is a full port forged brass ball valve suitable for a wide range of plumbing and heating applications. This valve is designed to be soft soldered into lines without disassembly. Proudly Made in the USA.

FEATURES

- · Heavy Pattern Forged Design
- Full-Port Flow
- · Superior RPTFE Seats and Packing
- Adjustable Stem Packing
- Blow-Out Proof Stem
- · Corrosion Resistant Materials
- 100% Factory Tested
- · Silicone Free Assembly
- Made in USA, ARRA Compliant

PERFORMANCE RATING

- Valve Design Rating: 600 CWP
- Temperature Range: 0°F 400°F

APPROVALS

- MSS SP-110 Ball Valves
- IAPMO IGC-157 Ball Valves (1/2"-4")
- NSF/ANSI 61 Section 8 (Except 4" Brass Ball & Stem)
- FM 1140 (1/2"-2")

OPTIONS


- (-01) Standard Lever
- (-04) 2 1/4" Stem Extension (1/2"-2")
- (-07) Tee Handle (1/2"-2")
- (-11) Therma-Seal[™] Insulating Tee Handle (1/2"-2")
- (-27) Locking Handle (1/2"-2")
- 77F240 Series SS Ball & Stem
- 77FLF Series Lead Free 0.25% max

STANDARD MATERIALS LIST

| Part Name | Material |
|--------------|--|
| Body | Brass, ASTM B283 alloy C37700 |
| Seat | RPTFE |
| Ball | Brass, ASTM B16, C36000 or B283, C37700 Chrome Plated |
| Stem Packing | RPTFE |
| Nut | Corrosion Resistant Plated Steel |
| Stem | Brass, ASTM B16, C36000 |
| Retainer | Brass, ASTM B283 alloy C37700 or B16, C36000 |
| Handle | Plated Steel / Insulated Polyvinyl |
| Gland | Brass, ASTM B16, C36000 |

DIMENSIONS

| Model | Size | Dimensions (in.) | | | | | Wt. |
|------------|--------|------------------|------|------|------|-------|--------|
| Number | (in.) | A | В | C | D | E | (lbs.) |
| 77F-203-01 | 1/2" | 0.50 | 1.37 | 2.37 | 1.66 | 2.85 | 0.4 |
| 77F-204-01 | 3/4" | 0.75 | 1.72 | 3.13 | 1.91 | 3.86 | 0.9 |
| 77F-205-01 | 1" | 1.00 | 2.01 | 3.73 | 2.11 | 3.86 | 1.3 |
| 77F-206-01 | 1-1/4" | 1.25 | 2.07 | 3.97 | 2.44 | 4.75 | 2.0 |
| 77F-207-01 | 1-1/2" | 1.50 | 2.42 | 4.69 | 2.91 | 5.42 | 3.3 |
| 77F-208-01 | 2" | 2.00 | 2.91 | 5.82 | 3.69 | 7.77 | 5.6 |
| 77F-209-01 | 2-1/2" | 2.50 | 3.68 | 7.05 | 4.14 | 7.77 | 11.6 |
| 77F-200-01 | 3" | 3.00 | 4.26 | 8.15 | 5.03 | 9.92 | 19.3 |
| 77F-20A-01 | 4" | 4.00 | 4.82 | 9.57 | 5.70 | 14.78 | 25.6 |

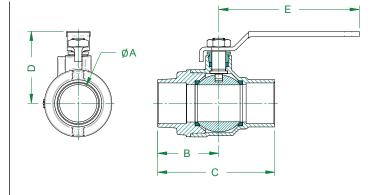

Apollo Valves, Manufactured by **Conbraco Industries, Inc.** 701 Matthews Mint-Hill Road, Matthews, NC 28105 USA www.**apollovalves**.com | (704) 841-6000

