

# 'Apollo' Valves

## SUBMITTAL SHEET

### 77W Series

APOLLOXPRESS® Press End Bronze Ball Valve



<b>Job Name:</b>	
<b>Job Location:</b>	
<b>Engineer:</b>	
<b>Contractor:</b>	
<b>Tag:</b>	
<b>PO Number:</b>	
<b>Representative:</b>	
<b>Wholesale Distributor:</b>	



### DESCRIPTION

The APOLLOXPRESS® 77W Series Ball valve is designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition. The 77W is ideal for installation in most plumbing and heating systems, including potable water. Now with Leak Before Press® feature and 250 psig maximum working pressure.

### FEATURES

- Full-Port Flow
- Adjustable Stem Packing
- Fast, Reliable, Economical Press Installation
- Ridgid® XL Press Tool Compatible
- Leak Before Press® Technology
- Blow-Out Proof Stem
- Corrosion Resistant Materials
- 100% Factory Tested
- Silicone Free
- **Made in USA**, ARRA Compliant

### PERFORMANCE RATING

- Maximum Operating Pressure 250 psi
- Temperature Range: 0°F - 250°F

### APPROVALS

- MSS SP-110 Ball Valves
- NSF/ANSI 61 Section 8
- Directive 2011/65/CE (RoHS)

### APPROVED APPLICATIONS

- Water including Potable Water
- Hydronic Heating (50% glycol max)
- Not suitable for steam or flammable gas service
- Not compatible with soft annealed copper tubing.

### OPTIONS


- (-04) 2 1/4" Stem Extension
- (-07) Tee-Handle
- (-10) Stainless Steel Handle and Nut
- (-11) Therma-Seal™ Insulating Tee Handle
- (-92) Standard Lever with Balancing Stop
- (-94) 2 1/4" Stem Extension and Balancing Stop
- (-HC) Press x 3/4" Hose w/ Cap & Chain (1/2" & 3/4")
- (77W-140 Series) S.S. Ball and Stem
- (77WLF Series) Lead Free (0.25% Lead Max)

### STANDARD MATERIALS LIST

Part Name	Material
Body	Cast Bronze C89836
Seat	Multi-Fill PTFE
Ball	ASTM B16 Brass, plated or B283, C37700
Stem Packing	Multi-Fill PTFE
Nut	Corrosion Resistant Plated Steel
Stem	Brass, ASTM B16, UNS# C36000
Retainer	Brass, ASTM B16, UNS# C36000
Handle	Plated Steel/Insulated Polyvinyl
Gland	Brass, ASTM B16, UNS# C36000
O-Ring Seals	EPDM

### DIMENSIONS

Model Number	Size (in.)	Dimensions (in.)					Wt. (lbs.)
		A	B	C	D	E	
77W-103-01	1/2"	0.50	1.54	3.08	1.50	3.74	0.6
77W-104-01	3/4"	0.75	1.78	3.55	2.01	4.78	1.1
77W-105-01	1"	1.00	2.12	4.24	2.20	4.78	1.8
77W-106-01	1-1/4"	1.25	2.61	5.22	3.13	7.04	4.3
77W-107-01	1-1/2"	1.50	2.96	5.92	3.10	7.04	4.6
77W-108-01	2"	2.00	3.74	7.47	3.48	7.04	8.2

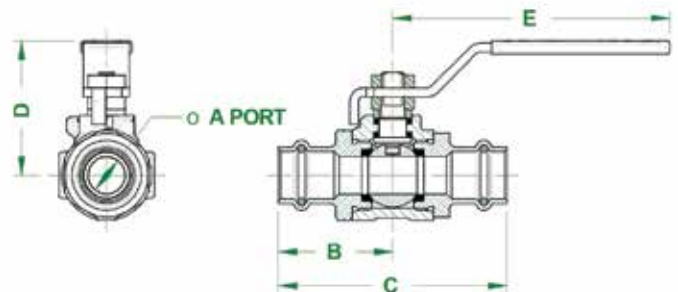

Apollo Valves, Manufactured by **Conbraco Industries, Inc.**  
 701 Matthews Mint-Hill Road, Matthews, NC 28105 USA  
[www.apollovalves.com](http://www.apollovalves.com) | (704) 841-6000

*This specification is provided for reference only. Conbraco Industries Inc. reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold. Please visit our website @ [www.apollovalves.com](http://www.apollovalves.com) for the most current information.*

