



Model YCT

CAST IRON WYE-STRAINER

CLASS 250

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The Apollo® International YCT Strainers are designed to protect piping systems and process equipment from unwanted foreign particles with minimum pressure loss.

FEATURES

- 100% Factory Pressure Tested
- Self-Aligning Screen Design
- Conforms to ASME B16.4 Class 250
- Tapped Blow Off Connection with plug



MATERIAL SPECIFICATIONS

Body	Cast Iron, ASTM A126-B
Cap/Cover	Cast Iron, ASTM A126-B
Plug	Cast Iron, ASTM A126-B
Screen	304 Stainless Steel
Gasket	Graphite

PHYSICAL SPECIFICATIONS

Model Number	Size (IN)	Dimensions (in.)			Wt (LBS)
		A	B	C	
YCT01M20	1/4"	3.19	2.00	1/4	1.5
YCT02M20	3/8"	3.19	2.00	1/4	1.5
YCT03M20	1/2"	3.19	2.00	1/4	1.5
YCT04M20	3/4"	3.75	2.69	3/8	2.5
YCT05M20	1"	4.00	3.00	3/8	3
YCT06M20	1-1/4"	5.00	3.44	3/4	6
YCT07M20	1-1/2"	5.75	3.78	3/4	8
YCT08M20	2"	7.00	4.34	1	14
YCT09P045	2-1/2"	9.25	6.09	1-1/2	29
YCT00P045	3"	10.00	7.41	1-1/2	38

Model number and item number shown are for female NPT connections.

PERFORMANCE RATING:

Working pressure (non-shock):

STEAM 250 PSIG @ 406°F

WATER, OIL, GAS 400 PSIG @ 150°F

OPTIONS (SUFFIX)


- (M20) – 20 MESH (Standard 1/4"-2")
- (P045) – .045 PERF (Standard 2-1/2"-3")
- (M40) – 40 MESH
- (M60) – 60 MESH
- (M80) – 80 MESH
- (M100) – 100 MESH
- (P062) – 1/16" PERF
- (P094) – 3/32" PERF
- (P062) – 1/16" PERF
- (P125) – 1/8" PERF
- (P156) – 5/32" PERF
- (P187) – 3/16" PERF
- (P250) – 1/4" PERF

NOTES:

1. All screens not available for all sizes
2. For mesh sizes smaller than M20, a P045 perf. liner is added to support the mesh screen.

APPROVALS:

CSA B-51 CRN OE0591.9C

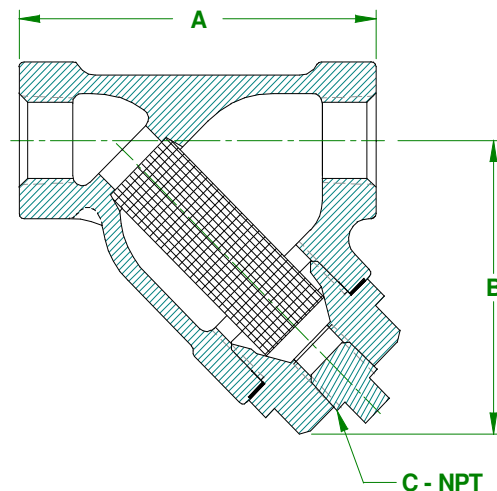

Part Numbering Matrix

YCT - 09 - P045


SERIES NUMBER
YCT - CAST IRON, THREADED
WYE STRAINER

SIZE
01 - 1/4"
02 - 3/8"
03 - 1/2"
04 - 3/4"
05 - 1"
06 - 1-1/4"
07 - 1-1/2"
08 - 2"
09 - 2-1/2"
00 - 3"

SCREEN OPTIONS
M20 - 20 MESH (STANDARD 1/4"-2")
P045 - .045 PERF (STANDARD 2-1/2"-3")
M40 - 40 MESH
M60 - 60 MESH
M80 - 80 MESH
M100 - 100 MESH
P062 - 1/16" PERF
P094 - 3/32" PERF
P125 - 1/8" PERF
P156 - 5/32" PERF
P187 - 3/16" PERF
P250 - 1/4" PERF
*ALL SCREENS NOT AVAILABLE FOR ALL SIZES

Performance Data

1/4" - 2": 20 mesh screen
2-1/2" - 3": 3/64" perforated screen

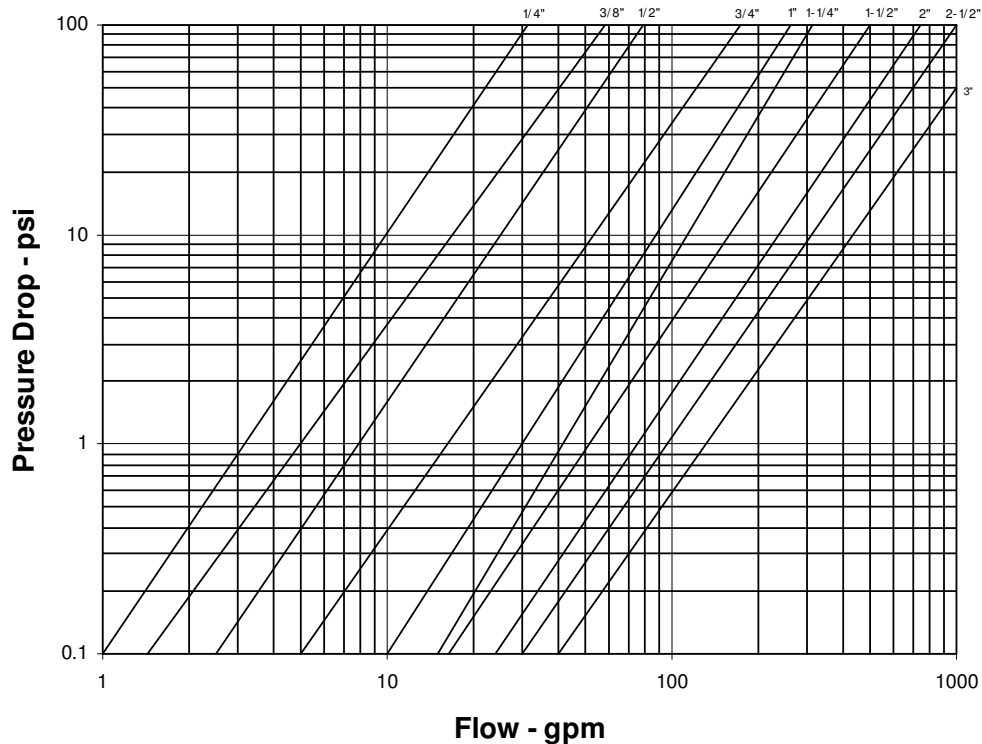

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28106 USA; www.conbraco.com; 704-841-6000

Conbraco Industries can accept no responsibility for possible errors in this document and reserves the right to alter its product design or construction without notice and without incurring any obligation to make such changes on Conbraco products previously or subsequently sold. All product specifications are approximate and are provided for reference only.