




20-400: SIDE MOUNTED HANDWHEEL WATER GAUGES

OVERVIEW

Side-mounted handwheels allow water gauge operation in hard-to-reach places; with all the 20 Series design features.

FEATURES

- Ideal for concealed jacketed type boilers
- No guard rod brackets: **20-405, 20-406, 20-410**
- Brackets and guard rods standard: **20-407, 20-408**
- EPDM standard gauge glass gasket
- Compact - requires minimum space
- Standard 1/4" needle drain valve
- Rated: 125 psig @ 350°F, 300 psig @ 100°F (See note!)
- 1-1/4" Extended shank length; **20-410**
- CRN Registered

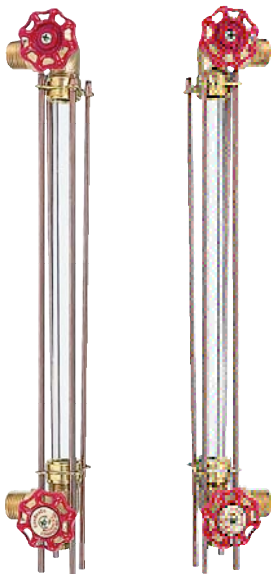

LH

RH

Part Number	Side	Pipe Size (in.)	Glass O.D. & Length	Wt./100 (lbs.)	Shank Length (in.)	Wheel Type
20-405-00	RH	1/2	5/8 x 12	165	.69	ALUMINUM
20-406-00	LH	1/2	5/8 x 12	165	.69	ALUMINUM
20-407-00	RH	1/2	5/8 x 12	170	.69	ALUMINUM
20-408-00	LH	1/2	5/8 x 12	170	.69	ALUMINUM
20-410-00	LH	1/2	5/8 x 12	180	1.25	ALUMINUM

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.

OPTIONS

Suffix Number	Specification
-00	Standard gauge w/ standard glass & rod
-01	Top only
-02	Bottom only
-03	Standard gauge less glass & rod
-10	For special gauges w/ non-standard glass and rod lengths